



LEAK
DETECTION

THREADED
JOINTS

GAS & PLUMBING

LEAK DETECTION, SEALANTS & ANCILLARY PRODUCTS

CLEANERS

FLANGE
JOINTS

GENERAL
LUBRICATION

REPAIR
COMPOUND

GAS & PLUMBING

LEAK DETECTION, SEALANTS & ANCILLARY PRODUCTS


At ROCOL® we pride ourselves on producing technically advanced products with industry needs at their core. Each and every product has been developed in the spirit ROCOL is renowned for:

- Trusted superior performance
- High quality
- Technical innovation
- Problem solving
- Excellent technical and after-sales support


ROCOL's extensive portfolio includes a comprehensive range of high performance specialist sealants for the Gas & Plumbing sector. Specifically designed to meet appropriate requirements and standards, our products offer exceptional performance and reliability in an industry where reputation is everything.

The ROCOL Gas & Plumbing range consists of high performance leak detection, sealants, cleaners and general lubricants for use in the Gas & Plumbing sector. Our specially formulated products have been developed to provide optimum performance across a wide range of applications fully catering for all needs within the Gas & Plumbing sector.

PRESSURE RANGE

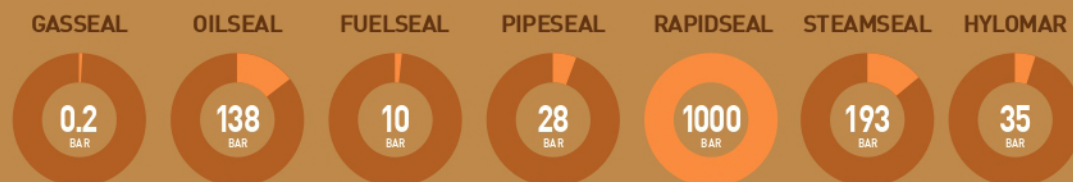

TEMPERATURE RANGE

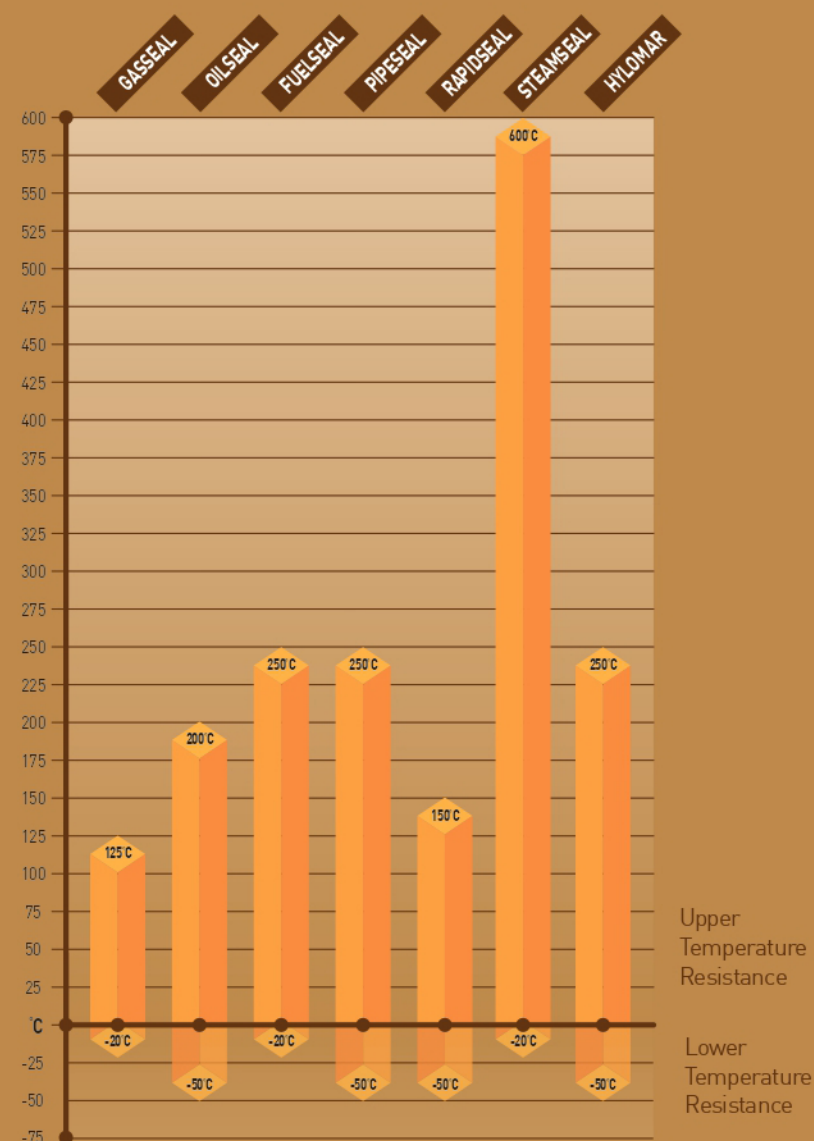

THREADED

GAS & LPG

(-20°C to +125°C) / 0.2 bar

GASSEAL

The ORIGINAL Non-Setting Pipe Sealant trusted by Gas Fitters



- Non setting pipe sealant for metallic threaded joints
- Suitable for use with natural gas and LPG pipe work – conforms to BS EN751 – 2 Class B
- Joints can be assembled and pressure tested immediately
- Non-corrosive to aluminium, brass, copper, low carbon steel and zinc
- Resists vibration
- Compatible with Rocol® LEAK DETECTOR Spray
- Suitable for use by registered gas installers

Part Code: 28042
Size: 300g
Flexibility Rating: 1

Application: Knife



MINERAL OIL, VEGETABLE OIL

(-50°C to +200°C) / 138 bar

OILSEAL

FOLIAC Pipe Sealant for Coarse Threads



- A semi-flexible sealant which is hard setting to form pressure tight seals
- Excellent high pressure and temperature performance
- Resists vibration
- Mineral oil, white spirit and petroleum compatible
- Up to 138 bar and 200°C

Part Code: 28032
Size: 300g
Flexibility Rating: 3

Application: Brush



PETROL, DIESEL, BIODIESEL & FUEL OIL

(-20°C to +250°C) / 10 bar

FUELSEAL




FOLIAC SUPER RED Pipe Sealant



- Flexible setting pipe jointing compound for high pressure and sealing threads and face connections
- Effective sealing for fuel oils and petroleum
- Resists vibration and thermal environmental changes
- Suitable for petrol, diesel, biodiesel and fuel oils

Part Code: 30051
Size: 375g
Flexibility Rating: 4

Application: Brush

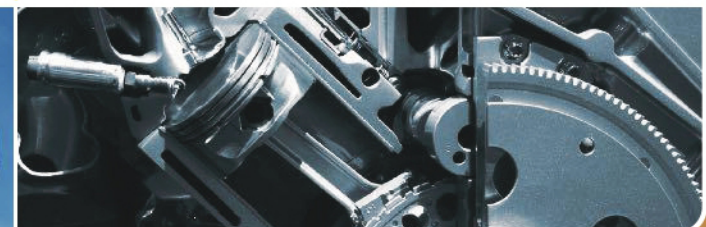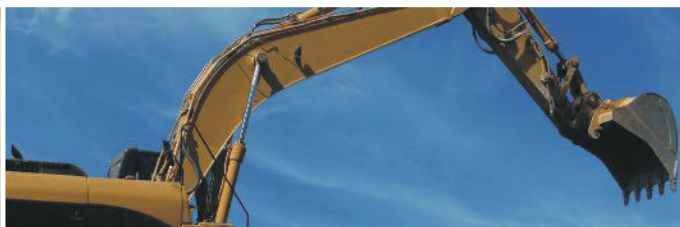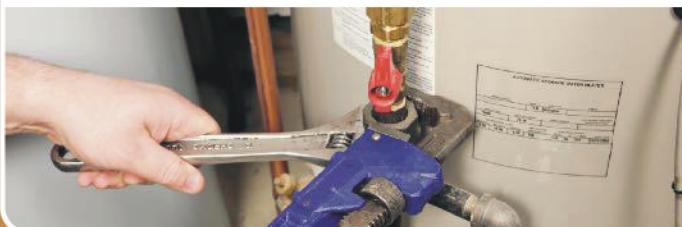

THREADED

UNIVERSAL

(-50°C to +150°C) / 1000 bar

RAPIDSEAL

FOLIAC Rapid-Curing Pipe Sealant for Universal Applications
Particularly Effective in Scientific and Fine Industrial Applications



- Hard setting, rapid curing thread sealant
- Rapid cure speed minimises down time in breakdown and repair situations
- Water Regulations Advisory Scheme (WRAS) approved for use on hot (up to 85°C) and cold potable water
- Meets requirements of EN751-1
- Precision applicator improves working conditions and minimises waste
- Can replace traditional hemp/paste combinations
- Suitable for use with stainless steel, glycol, etc.

Part Code: 30026
Size: 50ml
Flexibility Rating: 5

Application: Precision



PTFE THREAD SEALANT

TWINEFLON®

Revolutionary Patented Pipe Thread Monofilament Sealant
Made of 100% PTFE for Sealing All Threaded Pipe Joints



- A dynamic sealant which adjusts its state during installation
- Chemically resistant to the most aggressive chemicals, solvents, fuels and acids
- Creates a seal by calendaring the PTFE into a film in the exact thickness required between the two pipe ends
- Approved to all the latest regulations for thread sealing materials including use on potable water, natural gas and LPG systems
- Replaces all other tapes
- Easier and quicker to install than other tapes

Part Code: 73295
Size: 175m

Application: Tape



SCIENTIFIC/FINE IND' THREADS

STEAM, AIR, WATER, MINERAL & VEGETABLE OIL

(-50°C to +250°C) / 28 bar

PIPESEAL



FOLIAC Pipe Sealant with PTFE for Fine Threads



- PTFE semi-flexible setting pipe sealant for particularly fine metallic threaded pipes
- Designed for scientific and fine industrial pipe work
- Can be used in the place of PTFE tape in many applications
- Suitable for pressures up to 28 bar
- Resists thermal expansion
- Temperature range -50°C to +250°C
- PTFE to prevent damage to fine threads on breakaway

Part Code: 28022
Size: 300g
Flexibility Rating: 3

Application: Brush

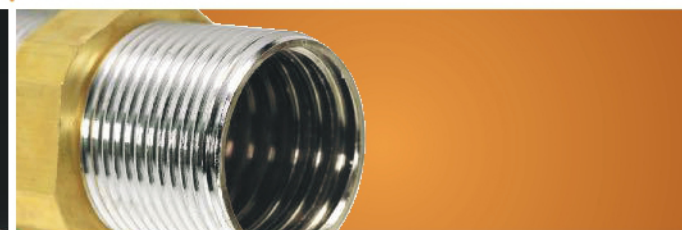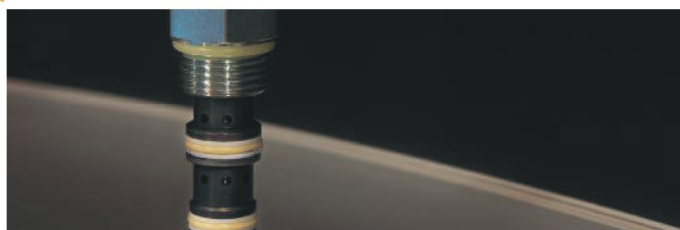

THREADED & FLANGE

UNIVERSAL

(-50°C to +250°C) / 35 bar

HYLOMAR JOINTING COMPOUND

Non-setting sealant and gasket compound for threaded and flanged joints



- A blue non-setting sealant for the effective sealing of metal & most plastic to plastic components
- Excellent temperature range from -50°C to 250°C
- Can resist pressures of up to 35 bar (500psi)
- Joints sealed with HYLOMAR compound are easy to break & clean
- Non-setting and non-hardening and resists vibration, thermal expansion and contraction of joints
- Particularly effective for sealing flanges subjected to extreme vibration and distortion

Part Code: 28060
Size: 100g

AIR, STEAM & WATER

(-20°C to +600°C) / 193 bar

STEAMSEAL

FOLIAC graphite and manganese high pressure pipe sealant



- Dark grey hard setting but flexible compound for pipes, flanges and face joints
- Heavy duty industrial black pipe jointing compound
- Efficient sealing to 193 bar
- High and low pressure steam, water and air
- Temperature range of -20°C to +600°C

Part Code: 30042
Size: 400g
Flexibility Rating: 4

REPAIR COMPOUND

METAL REPAIR COMPOUND

METAL REPAIR COMPOUND

New and improved, solvent free, epoxy putty containing non-rusting metallic fillers



- A permanent repair compound which can be used to repair castings, valve and pump components
- A wide temperature range from -40°C to +150°C
- Simple and convenient to use and adheres to most metallic substrates
- Resistant to hydrocarbons, ketones, alcohols, esters, halocarbons, aqueous salt solutions, dilute acids and caustics
- Holds in 5-10 minutes, is usable after 60 minutes, with a full cure after 24 hours

Part Code: 64012
Size: 56g



GENERAL LUBRICATION

SILICONE GREASE

SILICONE GREASE

SAPPHIRE® AQUA-SIL

High temperature water and chemical resistant silicone grease



- High temperature water and chemical resistant silicone grease
- Water Regulations Advisory Scheme approved
- Excellent high temperature performance range
- Ideal for the assembly of rubber 'O' rings and seals
- Good resistance to chemicals, oils, water and gasses
- Compatible with most rubbers and plastics
- Temperature range of -40°C to +200°C
- NLGI No. 3/4

Part Code: 12251, 12253, 12256
Size: 85g, 500g, 5kg

SAPPHIRE® AQUA-SIL HI-LOAD

Heavy duty, potable water and chemically resistant silicone grease



- Heavy duty potable water & chemically resistant silicone grease
- Water Regulations Advisory Scheme approved product
- Excellent high temperature performance range
- Particularly suited for larger valves and assemblies common to water treatment plants
- Good resistance to chemicals, oils, water and gasses
- Compatible with most rubbers and plastics
- Temperature range of -40°C to +200°C

Part Code: 12263, 12266
Size: 500g, 5kg


M23660 GAS TAP LUBRICANT

Effective lubrication and sealing of gas taps and taper plug cocks



- Suitable for high temperature application up to +120°C
- Good lubricating and sealing properties
- Contains molybdenum disulphide for excellent anti-wear and anti-seize
- Meets the requirements of BS5494:1978, service No. 6 (30,000 operations)

Part Code: 32020
Size: 50g

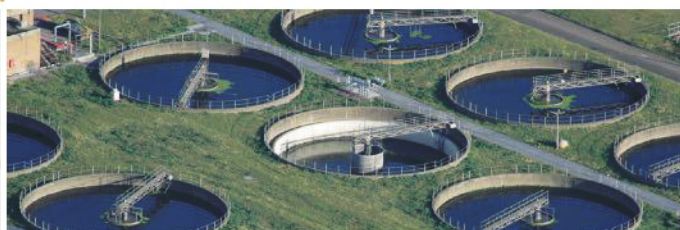

GENERAL LUBRICATION

RELEASE & DISMANTLING

REAMING, TAPPING & DRILLING

FOOD GRADE RELEASE & DISMANTLING

SHOCK RELEASE SPRAY


Food grade release and dismantling lubricant with shock freeze action



- Freezing action causes micro-cracking for rapid release
- Advanced synthetic base oils for highly effective dismantling
- DETEX metal detectable plastic components (aerosol caps & actuators)
- Reinforced with sub micron PTFE
- Safe for use on wide range of material
- Shock cooling temperature -40°C
- NSF H1 registered
- Safe for incidental food contact
- 360° valve for use in difficult to reach areas
- Built in mini jet for accuracy

Part Code: 32040
Size: 400ml

Application: Spray

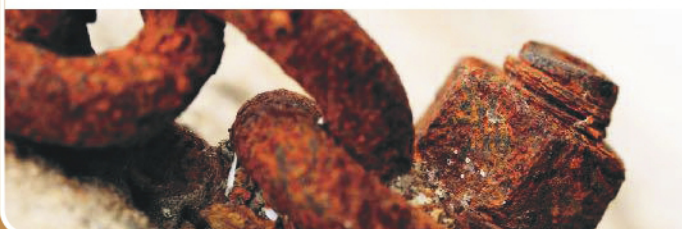

RTD LIQUID®


RTD is a reaming, tapping and drilling lubricant which has been specifically formulated to double tool life



- Minimise tool/tap breakages
- Reduce scrap
- Increase tool life
- Excellent surface finish
- Dimensional accuracy and repeatability
- Allow greater feeds and speeds
- Increase productivity and efficiency
- Multi metal compatibility - RTD does it all

Part Code: 53072, 53076, 53078
Size: 400g, 5L, 20L

Application: Precision

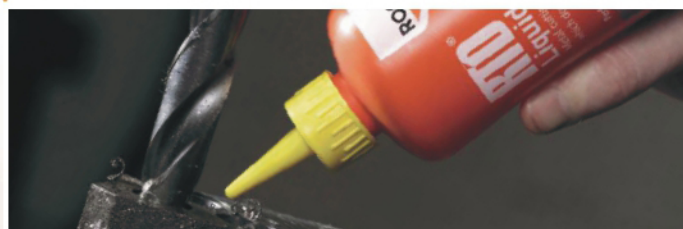

LEAK DETECTION

EN 14291:2004 APPROVED

NON-CORROSIVE

LEAK DETECTION SPRAY

Specially formulated aerosol for the rapid detection of positive pressure gas leaks



- Meets with the requirements of EN1429:2004 and is therefore MOT suitable
- Suitable for use with most positive pressure gas systems
- For use on pipework carrying natural gas and LPG
- Non-Corrosive
- 360° valve for use in difficult to reach areas
- Low chlorine content ensuring maximum plastic compatibility
- Meets the product specification given in IGE/UP/1B Edition 2
- Meets oxygen compatibility requirements of MIL-PRF-25567E

Part Code: 32030
Size: 300ml

Application: Spray



CLEANERS

NON-CONTACT CLEANER

ECO-LOGIC® AIR DUSTER

Air Duster with Low Global Warming Potential



- Low global warming potential
- Non-flammable
- Inert to virtually all surfaces
- High pressure blast removes dust and dirt easily
- Multi-angle spray allows use at any angle for access to difficult areas
- 360° valve for use in difficult to reach areas

Part Code: 32311
Size: 200ml

Application: Spray



NON-CONTACT CLEANER

INDUSTRIAL CLEANER Rapid Dry Spray

A multi-use, fast drying, powerful solvent cleaner designed to evaporate quickly leaving no residue



- A specially formulated blend of degreasing solvents
- Designed to remove grease, oil and workshop grime from all surfaces
- Safe on metal, most plastics and paint
- NSF K1 registered
- Ideal for the removal of RTD® Liquid
- DETEX metal detectable plastic components (aerosol caps & actuators)

Part Code: 34131
Size: 300ml

Application: Spray



NON-CONTACT CLEANER

PRECISION AIR DUSTER SPRAY

Non-Contact Cleaner for Removal of Dirt and Debris



- Suitable for use on most mechanical and electrical equipment
- Convenient and accurate in difficult to reach areas
- Innovative valve technology allows multi-angle use
- Non-flammable
- Ultra high pressure
- 360° valve for use in difficult to reach areas

Part Code: 32310
Size: 245g

Application: Spray



CLEANERS

HAND WIPES

SCRUBS

Highly effective, waterless, citrus-based hand-cleaning wipe



- Loosens, dissolves and absorbs dirt and grease
- One side of the towel is textured for heavy duty cleaning
- Will not transfer soil back onto hands
- One step cleaning process
- Conditions and softens hands
- Tough durable bucket that is light and portable

Part Code: 34100

Size: 72 Tub



THREADED	100g	245g	300g	375g	400g	500g	5kg	50ml	400ml	175m
GASSEAL			28042							
OILSEAL			28032							
FUELSEAL				30051						
RAPIDSEAL								30026		
TWINEFLON										73295
THREADED & FLANGE	100g	400g								
HYLOMAR	28060									
STEAMSEAL		30042								
SCIENTIFIC/FINE IND' TREADS	300g									
PIPESEAL	28022									
REPAIR COMPOUND	56g									
METAL REPAIR COMPOUND	64012									
GENERAL LUBRICATION	50g	85g	100g	400g	500g	5kg	400ml	175m	5L	20L
SAPPHIRE® AQUA-SIL		12251			12253	12256				
SAPPHIRE® AQUA-SIL HIGH-LOAD					12263	12266				
M23660 GAS TAP LUBRICANT	32020									
SHOCK-RELEASE SPRAY							32040			
RTD LIQUID				53072					53076	53078
LEAK DETECTION	300ml									
LEAK DETECTOR SPRAY	32030									
CLEANERS	245g	200ml	300ml	72 Tub						
PRECISION AIR DUSTER SPRAY	32310									
ECO-LOGIC® AIR DUSTER		32311								
INDUSTRIAL CLEANER Rapid Dry Spray			34131							
SCRUBS					34100					