


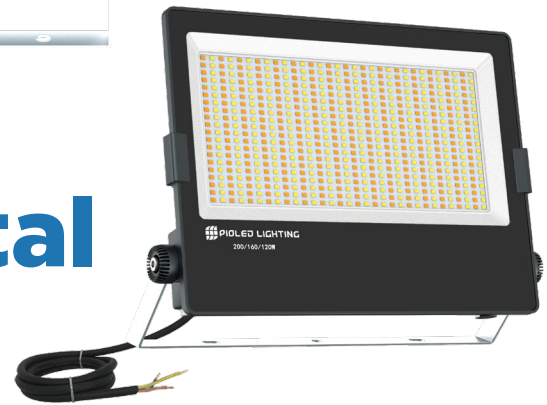

Voltron 4CCT & 3 Wattage Coastal Floodlight

200/160/120W

Applications:

Residential and Commercial Applications.

Product Performance

Wattage	200W/160W/120W
Colour Temperature & Stock Code	2200/3000/4000/6000K - F021
Operating Temperature	-20~40°C
Life Span/ LB Rating	L70B50@50000 hrs
IP Rating	IP65
LED Driver Brand	High Spec PioLED Driver
Beam Angle	120°
Impact Protection Grade	IK06
Input Voltage	100V- 265V
Surge Protection	10kV
Power Factor	0.9
CRI	>80
Lumen Output	200W = 30 000lm 160W = 24 000lm 120W = 18 000lm

Lumen Efficiency	150lm/W
------------------	---------


LED Chips	Philips 2835
-----------	--------------

LED Chips Qty	640
---------------	-----


Physical Characteristics

Weight (kg)	2400g
Housing Material	Powder Coated Aluminium
Product Dimensions (mm)	327*275*57
Cable Length	50cm
Mounting Option	-
Bracket Material	304 Stainless Steel Bracket
Bolts and Screws	Stainless Steel


Luminous Intensity Distribution Diagram

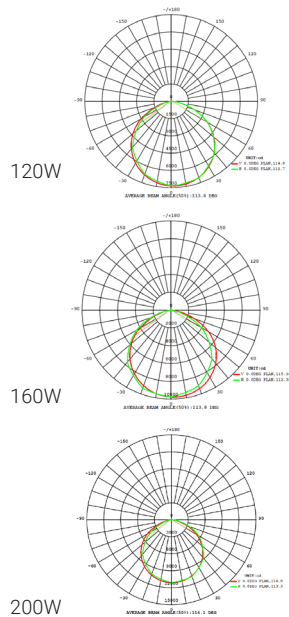

Packaging

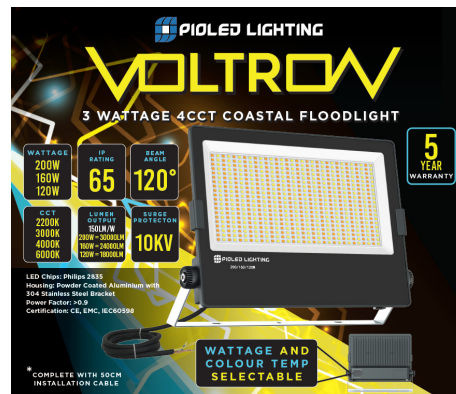

Dimension Drawing

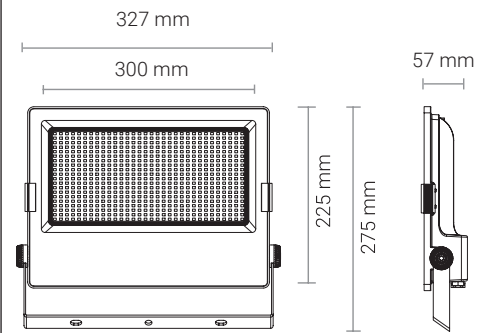

Technical Parameters

Input Current	0.8A-2.0A
Output Voltage	450V
Humidity	40%-60%
Frequency	50/60Hz
In Rush Current	450A
Output Current	0.44A
THD	<20%
TA & TC	TA=90/TC=85
IES (Yes or No)	Yes

Regulatory Qualifications

Class Rating	Class I
Energy Efficiency	A
Certification	CE, EMC, IEC60598
Accessories	

Optional accessories

Packaging info	
Storage Temp	-20~+40°C
Carton Size (mm)	39.5*35.5*31
QTY/CTN	6
Net Weight	14,7
Gross Weight	16,8