

INSTRUCTIONS

BONBON

8484.01 8484.02

Please read the instructions before commencing installation and retain for future reference.

SPECIFICATIONS:

- **Fitting:** Polyethylene body and moulded plastic handle
- **Lamp types:** 1.2W / 2700K – 3000K
- **Power Source:** 5V 1A
- **Charging Duration:** About 6hrs.
- **Operating time:** 8hrs (once fully charged).
- **Battery Type:** Lithium
- **Class of Insulation:** Class III
- **Ingress Protection:** IP54. Protection against the entry of dust and water jets
- **Quality/Corrosive rating:** Suitable for indoor and outdoor commercial and domestic applications.


INSTALLATION INSTRUCTIONS:

- Connect the device with the power source using an AC adaptor or USB charging device, the USB point is found underneath the fitting. Once connected, a red LED on the base will light up. USB cable included. (Fig. 1)
- Make sure that the device is turned off during the charging process.
- When the red light turns off, the fitting is fully charged.
- Disconnect the device from the power (AC adaptor) and press the “OFF/ON” button for 3 seconds to switch the fitting on.
- Press the “OFF/ON” button again to select your preferred colour or use remote controller to adjust the settings.
- Press the “OFF/ON” button for 3 seconds to switch the device off.
- When the fitting turns off without switching the fitting off, it is time to recharge the fitting.
- When the remote control does not work, please replace the battery-CR2025,3V

Please note:

To maintain a longer battery life, please comply with the following instructions when using this product:

- Charge the battery fully before use
- Before storing, please turn off the stand-by mode (via the switch on the product) and charge the battery fully to avoid a flat battery.
- When the product is stored under 25 degrees Celsius it can be left for up to 5 months. If left for longer than this period, make sure to fully charge the fitting again.
- If the battery quickly depletes faster after charging or does not charge, it has reached the end of its life.

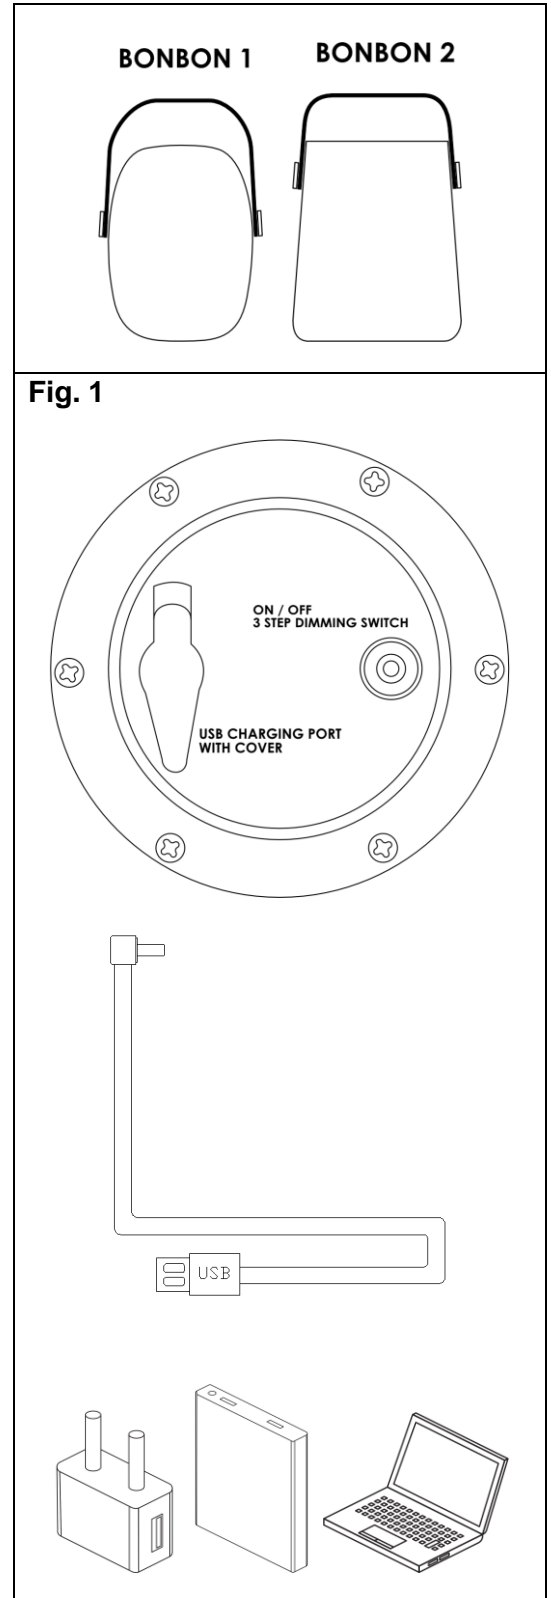

Spazio Lighting (Pty) LTD.

JOHANNESBURG OFFICE: 52 Andries Street | Wynberg/Sandton

CAPE TOWN OFFICE: 36 Milner Street | Paarden Eiland

DURBAN OFFICE: 31 Solstice Road | Umhlanga Ridge

011 555 5555 (Central Switchboard) | info@spazio.co.za