

INSTRUCTIONS



PULSE 3 WIRE TRACK SPOT

8911.30 8911.31

Please read the instructions before commencing installation and retain for future reference.

SPECIFICATIONS:

- **Fitting:** Extruded aluminum lamp housing
- **Lamp types:** 10W / 230V / Gu10 LED
- **Protection against electric shock:** CLASS II. Requires earth connection.
- **Ingress Protection:** IP20. Protection against the entry of solid bodies greater than 12mm.
- **Ballast:** not required
- **Quality/Corrosive rating:** Suitable for indoor residential and commercial applications.
- **Ambient temperature range:** -8°C to +55°C.

INSTALLATION INSTRUCTIONS:

⚠ Electrical products can cause death, injury or damage to property. Installation of this product must be carried out by a qualified electrician, in accordance with SANS 10142. On completion of installation, ensure that the Certificate of Compliance is updated.



CAUTION: Risk of electric shock


Ensure mains supply is switched off.

- Connect the track line to the mains supply through the power feed. (Fig.1)
 - Brown (Live) - to Brown or Red
 - Blue (Neutral) - to Blue or Black
 - Green/Yellow (Earth) - to Green/Yellow or Copper.
- Fix the fitting to the track line (Fig.2)
- Insert the lamp: (Fig.3)

Switch main supply back on.

WARNING:

- Ensure all items and screws are secure and fitted correctly.

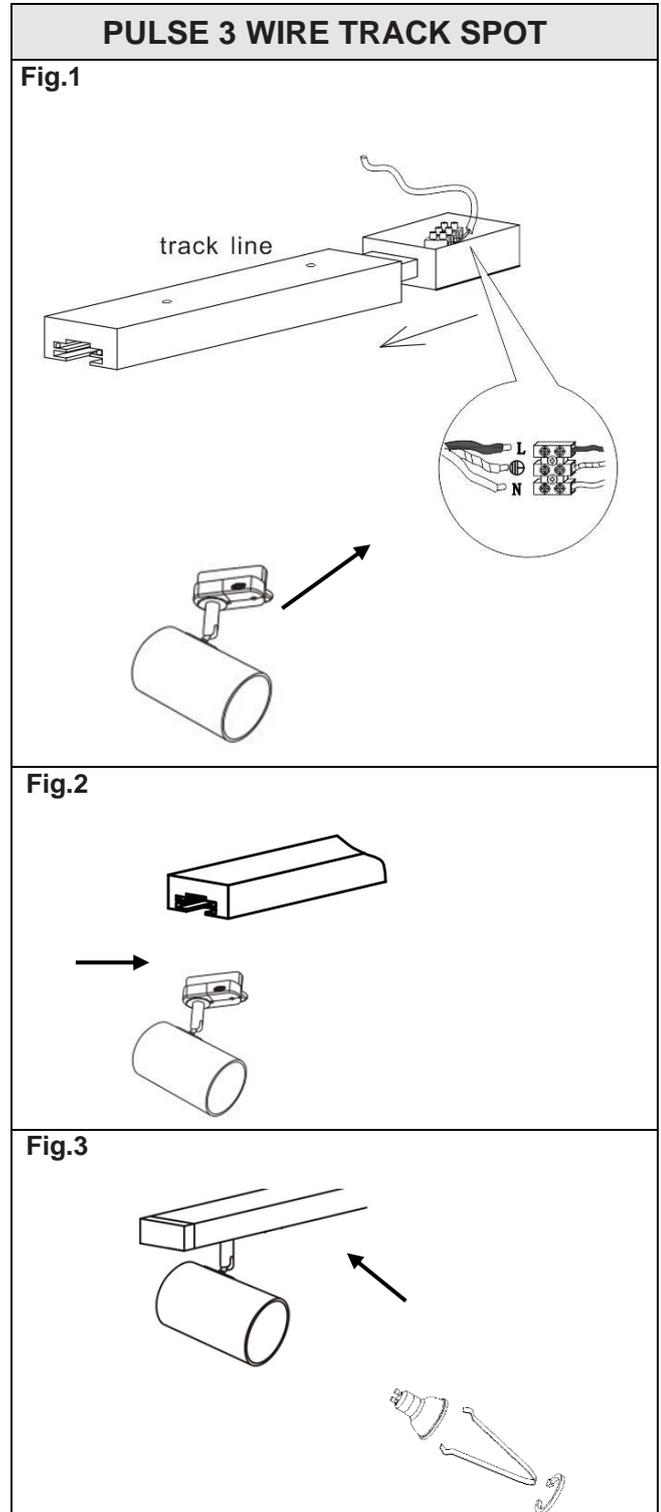

Spazio Lighting (Pty) LTD.

JOHANNESBURG OFFICE: 52 Andries Street | Wynberg/Sandton
CAPE TOWN OFFICE: 36 Milner Street | Paarden Eiland
DURBAN OFFICE: 31 Solstice Road | Umhlanga Ridge
011 555 5555 (Central Switchboard) | info@spazio.co.za